




PMX

Modular measuring amplifier system

Characteristic features

- Up to 16 measurement inputs
- 24 Bit A/D converter and 19200 Hz sampling rate per channel
- TEDS sensor detection
- Automatic synchronization of several devices
- 32 calculation channels with peak/limit values and mathematical functions
- Digital inputs/outputs, analog outputs
- Intuitive web server for parameterization/visualization
- Fast PROFINET/EtherCAT®
- Robust DIN rail wall mounting

Block diagram

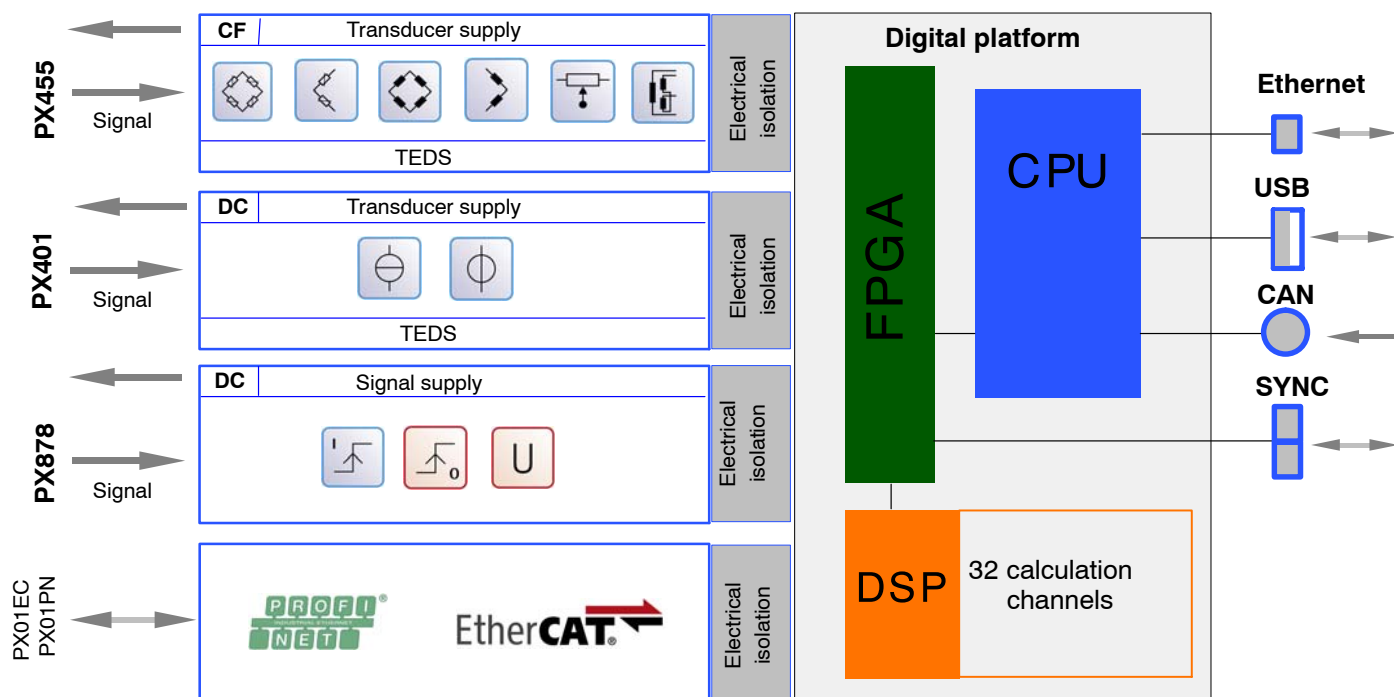

Specifications

Basic device		WG001/002
Racks	Number	1 communication card, 4 measurement cards
Supply voltage range (DC)	V	10 ... 30 (nominal (rated) voltage 24 V)
Voltage discontinuity (based on PLC standard DIN EN 61131-2) 24 V (– 10 %) 12 V (– 10 %)	ms ms	10 1
Supply voltage interruption		
Power consumption at 24 V supply voltage Basic device per PX455 per PX401 per PX878 EtherCAT ^{®1)} Field bus module PX01EC PROFINET Field bus module PX01PN	W W W W W W	3 1.6 0.75 2 1.9 2.3
Ethernet (data connection) Protocol/addressing Plug connection Cable type Max. cable length to module	m	IEEE802.3.; 10 Base-T / 100 Base-TX TCP/IP (direct IP address or DHCP) RJ45, 8 pin Standard LAN, CAT5, SFTP 100
Synchronization NTP protocol HBM protocol Plug connection Cable type Number of devices Line lengths between neighboring devices, max.	– m	Time via Ethernet Measured values in measuring raster and carrier frequency (module to module) RJ45, 8 pin Standard LAN, CAT5, SFTP 20 30
USB connection		USB 2.0 Host
CAN connection		CAN connection only with WG001 (CAN ISO11898)
Real time calculation in device Sum sampling rate Calculation channels Refresh rate Function	MW/s Quantity Hz	400,000 32 in real time 19200 Peak values, limit values, tolerance bands, mathematic calculation channels, signal characteristics, signal generators, 2-point scaling, 2-point controller, PID controller
Nominal (rated) temperature range	°C	0 ... 50
Operating temperature range (no condensation allowed/module not immune to water condensation)	°C	–10 ... +60
Storage temperature range	°C	–20 ... + 70
Rel. air humidity	%	5 ... 95 (non-condensing)
Protection class (height up to 2000 m, degree of pollution 2)		III
Degree of protection		IP20 per EN60529
Mechanical stress capability (test similar to DIN IEC EN600068, Part 2–6) Oscillation (30 mins in each direction) Impact (3 times in each direction; impact duration 11 ms) (test similar to IEC/EN 600068, Part 2–27)	m/s ² m/s ²	25 (5 ... 65 Hz) 200
EMC requirements		as per EN 61326 and EN 55011 (class B)
Fuses Automatic current limitation		per device card
Dimensions (H x W x D)	mm	200 x 200 x 122
Weight (fully equipped), approx.	g	2750

¹⁾ EtherCAT[®] is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany

Specifications

Measurement cards

SG and inductive full/half bridge, 4.8 kHz CF		PX455		
Accuracy class		0.1		
Carrier frequency (sine)	Hz	4800 ± 0.1%		
Bridge excitation voltage (effective)	V	2.5 ± 5%		
Connectable transducers ¹⁾³⁾ in six or five wire circuit SG half and full bridges Inductive half and full bridges, LVDTs	 Ω mH	 120...1000 4 ... 33		
Potentiometer		Deviations in accuracy class		
Cable length	m	1	50	100
1 kΩ	%	< 0.1	< 0.2	< 0.5
5 kΩ	%	< 0.1	< 3	< 8
Measurement frequency range (–3 dB)	kHz	2		
Sampling rate, max.	Hz	19200 ± 0.1%		
Active low-pass filter (Bessel/Butterworth)	Hz	0.1 ... 2000		
TEDS, IEEE1451.4		0-wire ²⁾⁴⁾		
Permissible cable length between PX455 and transducer	m	100 ⁴⁾		
Measurement range SG Inductive LVDT	mV/V mV/V mV/V	± 4 ± 100, ± 1000 ± 500		
Nominal (rated) temperature range	°C	0 ... 50		
Operating temperature range (no condensation allowed/module not immune to water condensation)	°C	–10 ... +60		
Storage temperature range	°C	–20 ... + 70		
Rel. air humidity	%	5 ... 95 (non-condensing)		
Protection class (height up to 2000 m, degree of pollution 2)		III		
Degree of protection		IP20 per EN60529		
EMC requirements		as per EN 61326 and EN 55011 (class B)		
Non-linearity	%	0.03		
Zero drift (excitation, 2.5 V) at 4 mV/V rel. to full scale value	% / 10 K	Full bridge: 0.05	Half bridge: 0.1	
Full scale drift (excitation, 2.5 V) at 4 mV/V rel. to full scale value	% / 10 K	Full bridge: 0.05	Half bridge: 0.05	
SG full bridge 4 mV/V				
Noise at 25 °C and 2.5 V excitation (peak-to-peak) with filter 0.1 Hz Bessel with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel with filter 2 kHz Bessel	 μV/V μV/V μV/V μV/V μV/V μV/V	 0.1 0.2 0.3 0.5 1.5 3		
Inductive full bridge 100 mV/V				
Noise at 25 °C and 2.5 V excitation (peak-to-peak) with filter 0.1 Hz Bessel with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel with filter 2 kHz Bessel	 μV/V μV/V μV/V μV/V μV/V μV/V	 2 3 4 5 10 15		

¹⁾ With bridge resistances from $R_B > 500 \text{ Ohm}$ or cable lengths $> 30 \text{ m}$: Lay transducer side resistances $R_B/2$ in the feedback lines.

²⁾ When using transducers with integrated 0-wire-TEDS, $R_B/2$ must be reduced by 100 Ohm in each sense line.

³⁾ With transducers $> 350 \text{ Ohm}$, the zero point must be measured in with cables $> 50 \text{ m}$ (tare/zero setting)

⁴⁾ Transducer side TEDS cannot be read after $R_B/2 > 300 \text{ Ohm}$

Specifications (PX455 continued)

Inductive full bridge 1000 mV/V			
Noise at 25 °C and 2.5 V excitation (peak-to-peak) with filter 0.1 Hz Bessel with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel with filter 2 kHz Bessel	μV/V	20	
	μV/V	30	
	μV/V	40	
	μV/V	50	
	μV/V	100	
	μV/V	200	
	SG half bridge 4 m/V		
Noise at 25 °C and 2.5 V excitation (peak-to-peak) with filter 0.1 Hz Bessel with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel with filter 2 kHz Bessel	μV/V	1	
	μV/V	2	
	μV/V	3	
	μV/V	4	
	μV/V	5	
	μV/V	10	
	Inductive full bridge 100 m/V		
Noise at 25 °C and 2.5 V excitation (peak-to-peak) with filter 0.1 Hz Bessel with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel with filter 2 kHz Bessel	μV/V	2	
	μV/V	3	
	μV/V	4	
	μV/V	5	
	μV/V	15	
	μV/V	30	
	Inductive half bridge 500 m/V, LVDT, potentiometer		
Noise at 25 °C and 2.5 V excitation (peak-to-peak) with filter 0.1 Hz Bessel with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel with filter 1 kHz Bessel with filter 2 kHz Bessel	μV/V	20	
	μV/V	30	
	μV/V	40	
	μV/V	50	
	μV/V	100	
	μV/V	200	
	Cut-off frequency (Hz) (–3 dB)		Runtime (ms)
Bessel			Butterworth
2000		0.16	0.23
1000		0.42	0.60
500		0.85	1.24
200		2.00	3.10
100		4.15	6.17
50		8.45	12.5
20		21.4	30.7
10		39	47
5		74	91
2		174	216
1		340	430
0.5		680	840
0.2		1680	2090
0.1		3360	4200

Specifications

Current module, voltage module		PX401
Accuracy class		0.1
Sampling rate	1/s	19200
Measurement frequency range (–3 dB)	kHz	3
Filter (Bessel/Butterworth)	Hz	0.1 ... 3000
TEDS, IEEE1451.4		1-wire
Transducer excitation (active transducer)		
Voltage (DC)	V	equivalent to device excitation
Current limitation	A	400 mA/card
Potential isolation		Between measurement cards and supply
Channels, individually switchable current/voltage	Number	4
Max. Common-mode voltage (to housing and supply ground)	V	50
Nominal (rated) temperature range	°C	0 ... 50
Operating temperature range (no condensation allowed/module not immune to water condensation)	°C	–10 ... +60
Storage temperature range	°C	–20 ... + 70
Rel. air humidity	%	5 ... 95 (non-condensing)
Protection class (height up to 2000 m, degree of pollution 2)		III
Degree of protection		IP20 per EN60529
EMC requirements		as per EN 61326 and EN 55011 (class B)
Voltage (DC) ± 10 V		
Measuring range	V	–10.5 ... + 10.5
Input impedance	MΩ	> 1
Noise at 25 °C (peak-to-peak)		
with filter 1 Hz Bessel	mV	0.25
with filter 10 Hz Bessel	mV	0.3
with filter 100 Hz Bessel	mV	0.5
with filter 1 kHz Bessel	mV	1
Common-mode rejection		
for DC common mode	dB	100
at 50/60 Hz common mode, typ.	dB	80
Non-linearity at 25 °C	%	0.05
Zero drift rel. to full scale value	% / 10 K	0.1
Full scale drift rel. to full scale value	% / 10 K	0.05
Current (DC) ± 20 mA		
Measuring range	mA	± 20
Value of load resistance	Ω	50 ± 1%
Noise at 25 °C (peak-to-peak)		
with filter 1 Hz Bessel	μA	0.5
with filter 10 Hz Bessel	μA	0.6
with filter 100 Hz Bessel	μA	1
with filter 1 kHz Bessel	μA	2
Non-linearity	%	0.05
Zero drift	% / 10 K	0.1
Full-scale drift	% / 10 K	0.1

Specifications (PX401 continued)

Cut-off frequency (Hz) (–3 dB)		Runtime (ms)	
		Bessel	Butterworth
3000		0.10	0.14
2000		0.20	0.28
1000		0.42	0.61
500		0.86	1.23
200		2.00	3.10
100		4.15	6.17
50		8.45	12.5
20		21.4	30.7
10		39	47
5		74	91
2		174	216
1		340	430
0.5		680	840
0.2		1680	2090
0.1		3360	4200

Specifications

Input / Output

Analog output and digital input/output card		PX878
Connection method		Plug (terminals/screws)
Refresh rate of all output signals	kHz	19.2
Nominal (rated) temperature range	°C	0 ... 50
Operating temperature range (no condensation allowed/module not immune to water condensation)	°C	-10 ... +60
Storage temperature range	°C	-20 ... +70
Rel. humidity at 31 °C	%	5 ... 95 (non-condensing)
Protection class (height up to 2000 m, degree of pollution 2)		III
Degree of protection		IP20 per EN60529
EMC requirements		as per EN 61326 and EN 55011 (class B)
Galvanic isolation		60 V DC voltage (or peak value), without transients
Analog outputs		
Number		5
Accuracy class		0.1
Signal sources		Real measurement signals and calculated signals
Rated voltage (output)	V	± 10
D/A converter resolution	bit	16
Output rate, max.	kHz	19.2
Cut-off frequency (3 dB), approx.	kHz	3
Output resistance	Ω	< 10
Permissible load impedance		10 kΩ 20 nF
Noise (peak-to-peak)	mV	< 10
Reference signal (common)		for all 5 outputs
Non-linearity (INL) Integral Non Linearity	LSB	± 16
Crosstalk attenuation	dB	> 90
Zero drift	mV / 10 K	10
Full-scale drift	mV / 10 K	10
Cable length, max.	m	100
Digital inputs		
Number		8
Switching time	ms	1
Input signal range	V	0 ... 30
Maximum permitted input level	V	30
Input low state	V	0 ... 5
Input high state	V	10 ... 30
Input resistance (nominal)	kΩ	7.5
Cable length, max.	m	100
Cable type (required for disruptive interference)		Shielded
Digital outputs		
Number		8
Switching time	ms	1
Input voltage (24 V nominal) U _{IN}	V	10 ... 30
Output current per output, max.	mA	200
Output current (sum outputs), max.	A	1.6
Minimum voltage level when loaded with 200 mA		Typ. U _{IN} – 0.7 V
Cable length, max.	m	100

Specifications


Communication cards

EtherCAT® field bus module		PX01EC
Type		EtherCAT® complex slave
Data Transport Layer		Ethernet II, IEEE802.3
Power consumption, max.	W	2
Cable type		Standard CAT-5, shielded
Cable length, max.	m	100
Connecting socket		RJ45 (IN/OUT)
Communication		
Baudrate	Mbit/s	100
Refresh rate	KHz	1.2; 2.4; 4.8; 9.6
Slave synchronization	–	No
Cyclic process input data, max. (Slave → Master)	bytes	400
Cyclic process output data, max. (Slave → Master)	bytes	200

PROFINET-IO field bus module		PX01PN
Data Transport Layer		Ethernet II, IEEE802.3
Power consumption, max.	W	2.4
Cable type		Standard CAT-5, shielded
Cable length, max.	m	100
Connecting socket		RJ45 (Port 1 / Port 2)
Communication		
Baudrate	Mbit/s	100
Refresh rate	KHz	1
Slave synchronization		No
Cyclic process input data, max. (Device → Controller)	bytes	400
Cyclic process output data, max. (Controller → Device)	bytes	200
Minimum cycle time	ms	1
Supported protocols		RTC (Real Time Cyclic) Class 1 unsynchronized Class 3 synchronized (IRT) RTA – Real Time Acyclic DCP – Discovery and Configuration CL-RPC – Connectionless Remote Procedure LLDP – Link Layer Discovery SNMP – Simple Network Management MRP client – Media Redundancy
Topology recognition		LLDP, SNMP, MIB2, physical device
VLAN and Priority Tagging (setting priorities)		Yes
Identification and maintenance		I&M0 ... I&M4 read and write
Unsupported protocols		RT via UDP Multicast communication DHCP Fast Startup Media redundancy (except MRP client) Supervisor-AR (Supervisor-DA-AR is supported) Maximum one input CR and one output CR

Specifications

Signal runtime (ms)

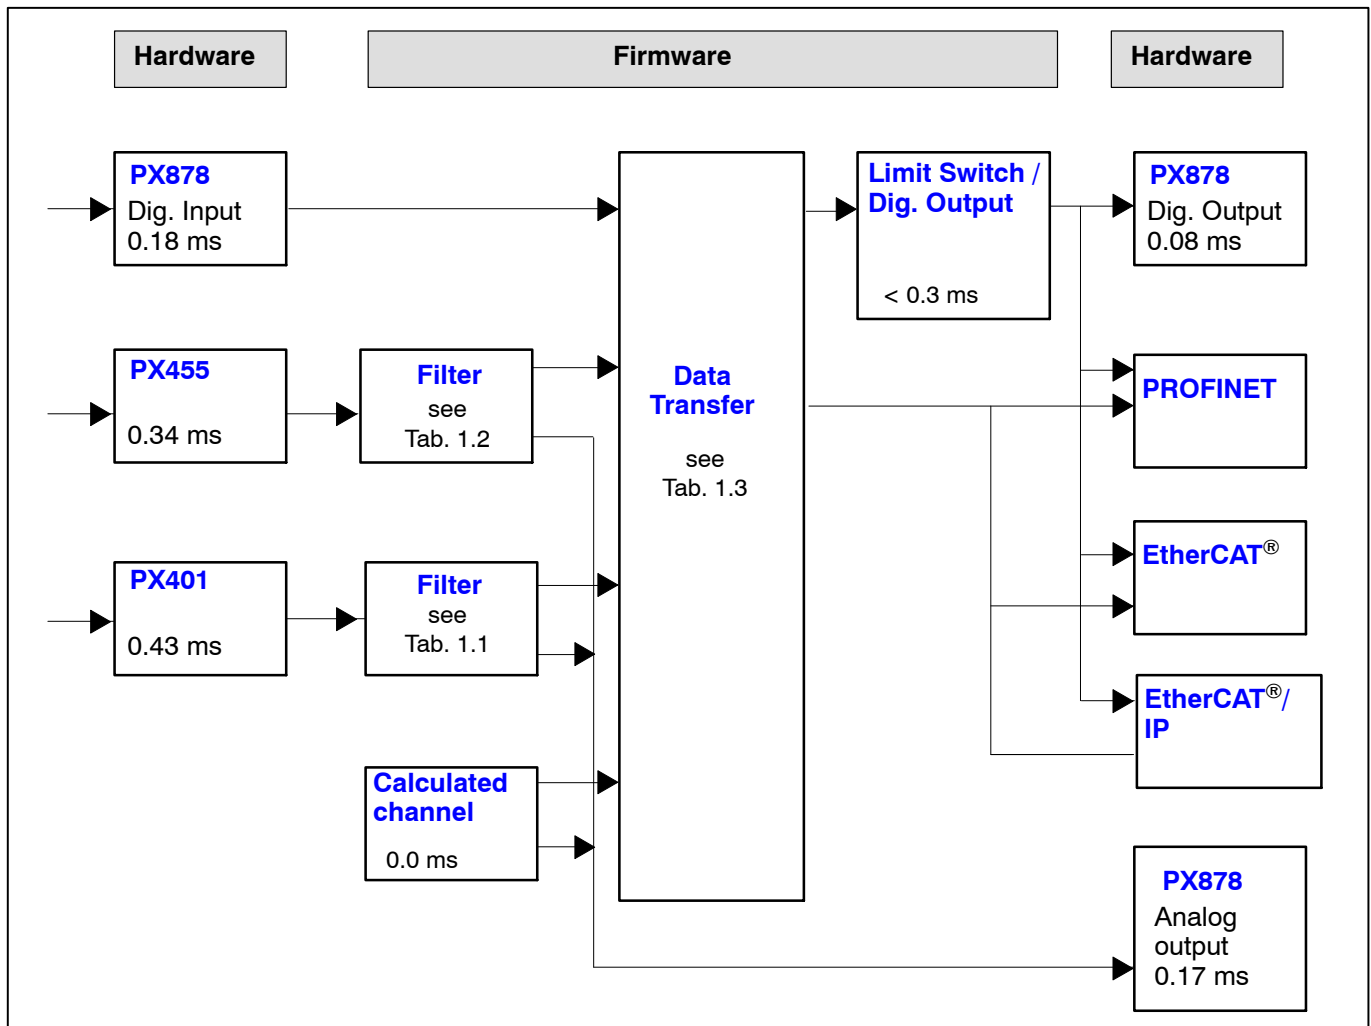

Cut-off frequency f_c [Hz] (–3dB)	Delay [ms]	
	Bessel	Butterworth
off	0	0
3000	0.10	0.14
2000	0.20	0.28
1000	0.42	0.61
500	0.86	1.23
200	2.00	3.10
100	4.15	6.17
50	8.45	12.5
20	21.4	30.7
10	39	47
5	74	91
2	174	216
1	340	430
0.5	680	840
0.2	1680	2090
0.1	3360	4200

Tab. 1.1: Delays for **PX401**

Cut-off frequency f_c [Hz] (–3dB)	Delay [ms]	
	Bessel	Butterworth
2000	0.16	0.23
1000	0.42	0.60
500	0.85	1.24
200	2.00	3.10
100	4.15	6.17
50	8.45	12.5
20	21.4	30.7
10	39	47
5	74	91
2	174	216
1	340	430
0.5	680	840
0.2	1680	2090
0.1	3360	4200

Tab. 1.2: Delays for **PX455**

Data transfer rate [Hz]	minimum [ms]	typical [ms]	maximum [ms]
1200	0.1	0.52	0.93
2400 (factory default)	0.1	0.31	0.52
4800	0.1	0.21	0.31
9600	0.1	0.16	0.21

Tab. 1.3: Data delays

Example:

Signal runtime of a sensor signal via the analog output with filter:

Signal path PX455 → 2 kHz Bessel → PX878

$$0.34^{*}) + 0.16 \text{ (Table 1.2)} + 0.17^{*}) \text{ ms} = 0.67 \text{ ms}$$

* See diagram on Page 9

Accessories, to be ordered separately


Accessories	Order number
Blank plate, blue (for communications module)	1-PX01
Blank plate, white (for measurement card module)	1-PX02
1 set DIN rail clips (2 pieces)	1-RAILCLIP
Phoenix plug-in terminals 1 set plug-in screw terminals (push-in) for PMX plug-in cards (4 pieces, incl. coding plug and labeling sheet) 1 set screw terminals (screw in) for PMX plug-in cards (4 pieces, incl. coding plug and labeling sheet) Screw-in screw terminals for PMX voltage supply (incl. coding plug and labeling sheet)	1-CON-S1008 1-CON-S1009 1-CON-S1010
Ethernet cross-over cable for direct connection of devices to a PC or notebook; length: 2 m, type: CAT5+	1-KAB239-2
AC/DC power pack Input : 90 V ... 240 VAC, 1.5 m cable, Output : 24 V DC, max. 1.25 A, 2 m cable with ODU connector	1-NTX001

Specifications NTX001 power pack

NTX001		
Nominal (rated) input voltage (AC)	V	100 ... 240 ($\pm 10\%$)
No-load power consumption at 230 V	W	0.5
Nominal (rated) loading		
U_A	V	24
I_A	A	1.25
Static output data		
U_A	V	$24 \pm 4\%$
I_A	A	0 – 1.25
U_{Br} (output ripple voltage; peak-to-peak)	mV	≤ 120
Current limiting , typically from	A	1.6
Isolation primary – secondary		electrical, by optical coupler and converter
Creepage and clearance distances	mm	≥ 8
High-voltage test	kV	≥ 4
Ambient temperature	°C	0 ... +40
Storage temperature	°C	-40 ... +70

Specifications (continued)


Connections

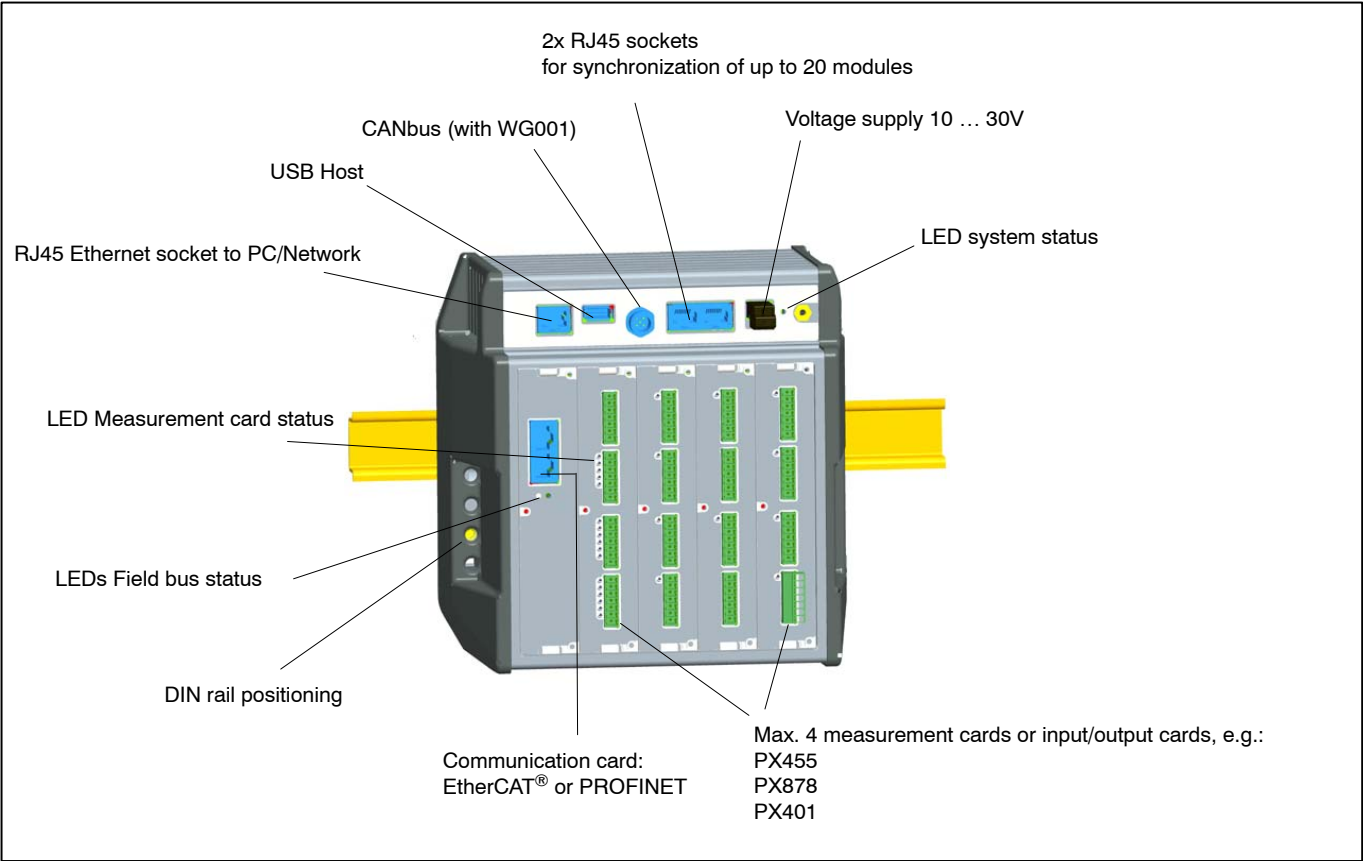

Combination options

	Slot 0	Slot 1	Slot 2	Slot 3	Slot 4	Number of plug-ins
Field bus or realtime Ethernet	x	–	–	–	–	0–1
PX401	–	x	x	x	x	0–4
PX455	–	x	x	x	x	0–4
PX878	–	x	x	–	–	0–2


Housing types

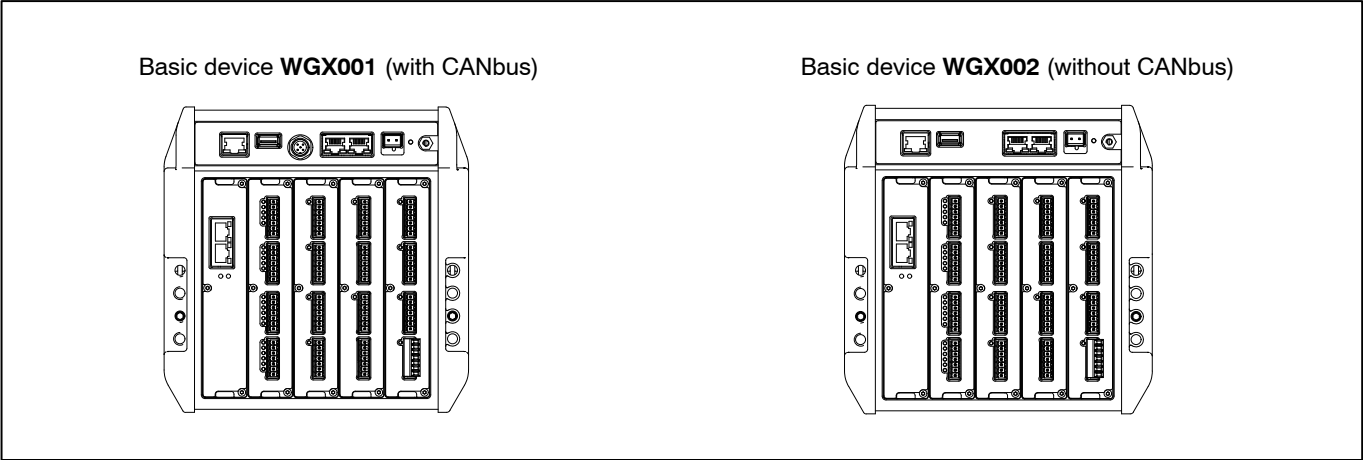


Specifications (continued)

Mounting

Support rail clips (included in scope of delivery)

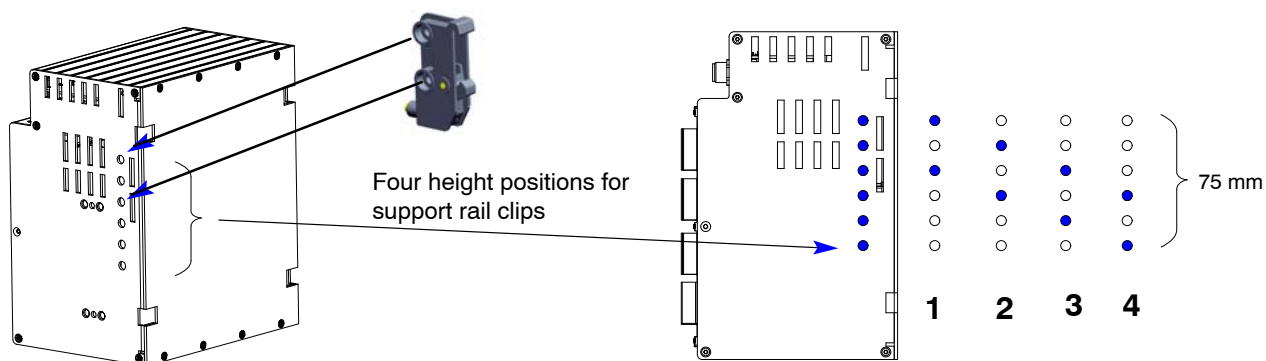


Basic device **WG001** (including CANbus) for max. 5 plug-in cards

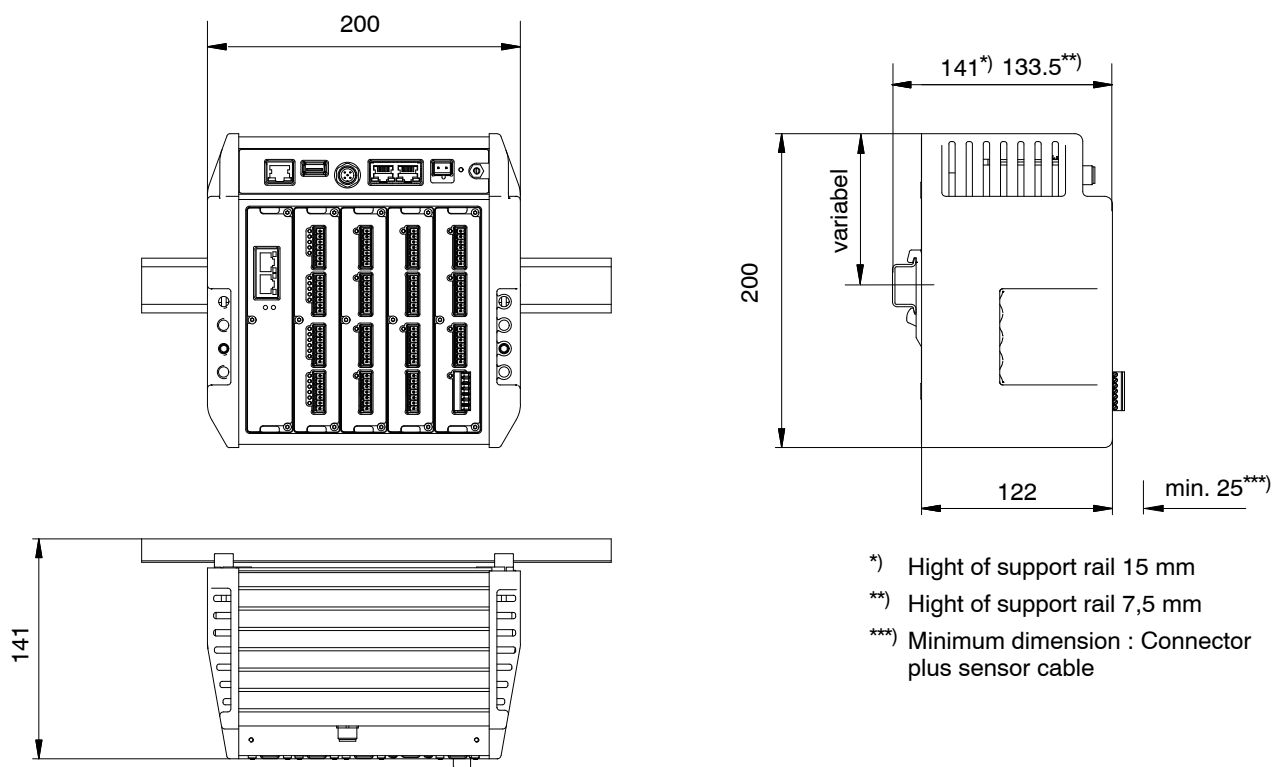



Specifications (continued)

Mounting

Wall mountings (included in scope of delivery)

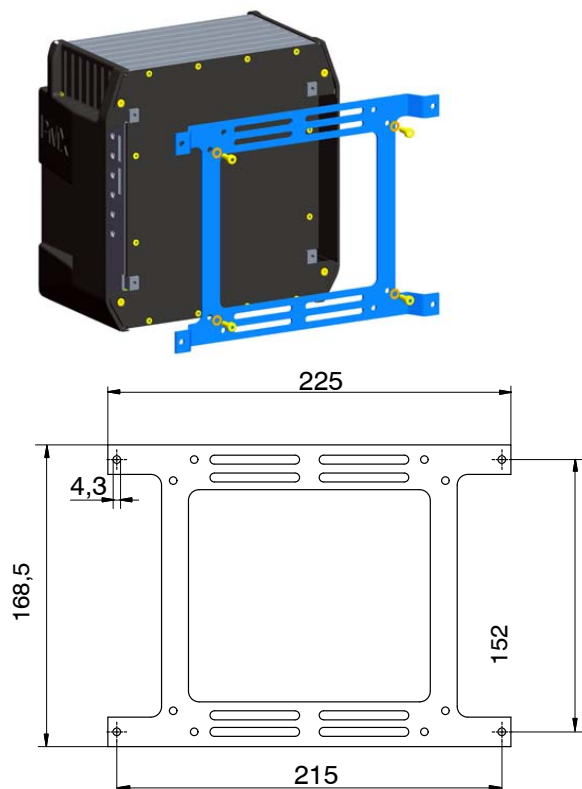

The wall mountings can also be fitted turned through 90°.

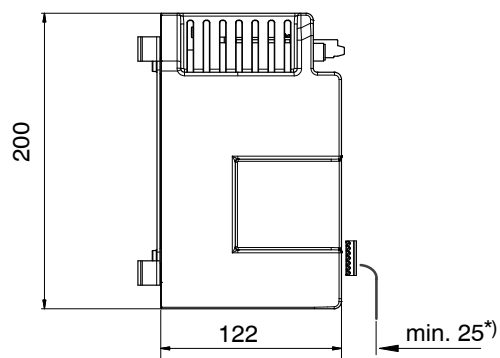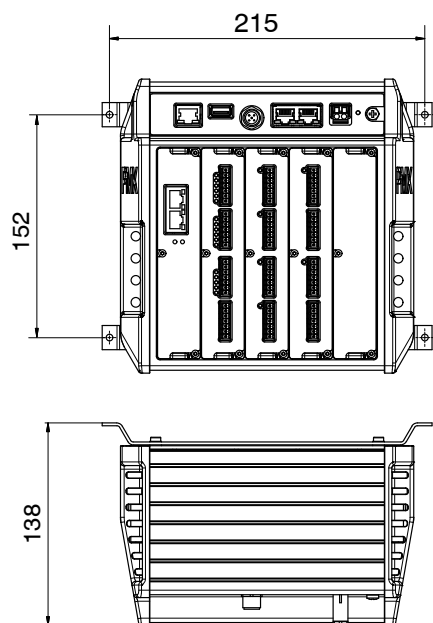

*) Minimum dimension : Connector plus sensor cable

©Hottinger Baldwin Messtechnik GmbH.
Modifications reserved. All details describe our products in
general form only. They are not to be understood as a
guarantee of quality or durability and do not constitute any
liability whatsoever.

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45 · 64293 Darmstadt · Germany
Tel. +49 6151 803-0 · Fax: +49 6151 803-9100
Email: info@hbm.com · www.hbm.com

measure and predict with confidence

